




# Fs Norwich

Porcelain tiles


FS Norwich

# FS Norwich

Porcelain tiles

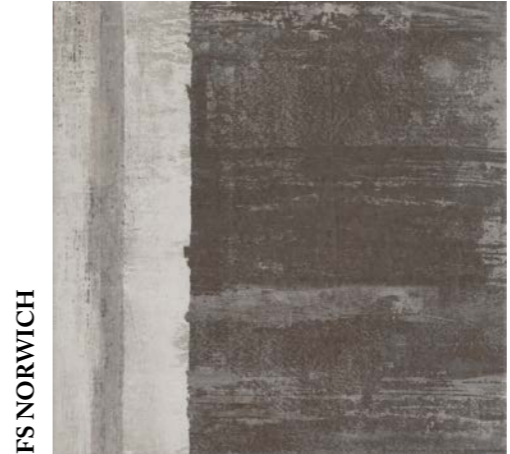

## FS NORWICH



33 \* 33 \* 0,95 cm | 13 \* 13"

NO RECTIFIED	NATURAL
	BN61
FS NORWICH	22058

### CARACTERÍSTICAS TÉCNICAS | TECHNICAL CHARACTERISTICS

joint	frost proof	versatile	matt	different shades	shade variation	various graphics	various moulds

### CARACTERÍSTICAS TÉCNICAS ANTIDESLIZAMIENTO | ANTI-SLIP CHARACTERISTICS

Ensayo   Essay	Características   Features	Resultado   Result
DIN 51130	Ángulo crítico (Pies calzados)   Critical angle (footwear)	R9
UNE-ENV 12633	Antideslizamiento (Test del péndulo)   Slip resistance (Pendulum test)	Class 1
AINSI A137.1	Coefficiente de Fricción Dinámico   Dynamic Coefficient of Friction (DCOF)	> 0,42
ISO 10545-7	Resistencia a la Abrasión Superficial/Resistance to Surface Abrasion	PEI 4

### EMBALAJE | PACKING

(Los pesos aquí reflejados pueden sufrir ligeras variaciones en función del lote de producción. Weights shown here may slightly vary depending on the production lot.)

Formato   Sizes	Cajas   Boxes			Pallet			Tamaño cm aprox.	Cont./20' 21500 kg.	Cont./20' 24000 kg.
	Piezas	m2/ sq.m	kg	Cajas	m2/ sq.m	kg			
33 * 33 * 0,95	10	1,09	22,92	48	52,32	1124	120 * 80 * 81	1055,23	1177,94
inch	Units	ft²	lb	Boxes	ft²	lb	Sizes inch approx.	ft²	ft²
13 * 13 * 3/8	10	11,73	50,52	48	563,17	2477,99	47 1/4 * 31 1/2 * 31 7/8	11358,54	12679,31